





WIRE MESH LATH & ACCESSORIES




MONTREAL · TORONTO · CALGARY · EDMONTON · VANCOUVER

CERAMIC TILE
INTERIOR/EXTERIOR STUCCO
PLASTERING



EXPANDED METAL LATH & ACCESSORIES



GALVANIZED DIAMOND MESH LATH


A general all-purpose mesh lath, ideal as a plaster base and reinforcement in interior and exterior construction. Easily formed for curved surfaces. The small rigid mesh provides perfect keying of the plaster. The most popular and versatile lath for ceilings, partitions and ceramic tile installation.

Sheet Sizes:

27" x 96"
packed 10 sheet (20 sq. yds.) per bundle
50 bundles/lift

Weights and Materials

1.75 lbs per sq. yd. galvanized	35 lbs/bdl
2.50 lbs per sq. yd. galvanized	50 lbs/bdl
3.40 lbs per sq. yd. galvanized	68 lbs/bdl



PAPER BACK METAL LATH


This is a combination of our galvanized diamond lath with special, heavy, asphalt saturated paper firmly attached to the back surface. The paper backing provides for protection against moisture penetration, making it ideal for exterior application or interior wet areas. In addition, the paper backing helps maintain uniform plaster depth, improves bonding and control of curling and adds to crack resistance.

Sheet sizes:

27" x 96"
packed 10 sheets (20 sq. yds.) per bundle
25 bundles/lift

Weight and Materials:


2.50 lbs per sq. yd. galvanized	50 lbs/bdl
---------------------------------	------------



K-LATH - STUCCO RITE

K-Lath is available in standard/heavy duty paper with 3/8" self-furring for conventional stucco, 1/8" and 1/4" for E.I.F.S. systems. Sheet size: 28" x 98"

Note: Many other K-Lath products are available. Please call for more information and pricing.

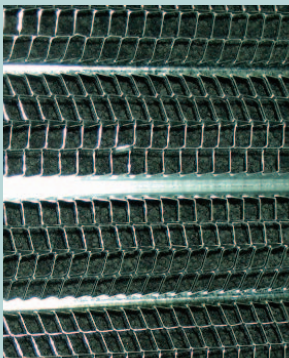

3/8" & 1/8" GALVANIZED HIGH RIB LATH

Straight, heavy, longitudinal ribs, full 3/8" high makes 3/8" high rib lath ideal for wider spans on walls and ceilings. This lath is self-furring when the ribs are turned inward on flat supports.


The 1/8" flat ribbed lath is an extra strong herring-bone mesh set at an angle to the sheet plane, making each side of the sheet identical, reversible and self-furring. Its greater stiffness allows for wider spacing of supports and its smaller mesh provides greater plaster economy.

Sheet sizes:

27" x 96"
packed 10 sheets (20 sq. yds.) per bundle
50 bundles/lift

Weights and materials:

3.40 lbs per sq. yd. galvanized	68 lbs/bdl
---------------------------------	------------



KWIK CORNER

This product is a welded wire assembly, affording a truer, stronger exterior corner. Kwik Corner reduces cracking in Portland cement plaster.

Flange size: 2 1/2" x 2 1/2"

Length: Available in 8', 9' and 10' length. 40 pcs per carton

Note: Also available as Plastic Arch Nose Regular and Arch Kwik Corner. Packaged 25 pcs per carton.



BAILEY
METAL PRODUCTS LIMITED



STUCCO MESH & ACCESSORIES



GALVANIZED STUCCO MESH

Available with 2" x 2" square openings. "Stucco" mesh is 16 gauge welded wire mesh "ribbed" to provide for proper keying.

2" x 2" mesh each roll 48" wide x 112.5' long 450 square feet per roll. 58 lbs/roll

GALVANIZED 1' X 1' MESH

A flat 16 gauge welded wire mesh.



1" x 1" mesh each roll 48" wide x 100' long, 400 square feet per roll. 100 lbs/roll



SAFETY EDGE CORNERITE

Cornerite is used to reinforce inside corners, preventing cracking. Both edges are completely smooth to assure safe handling and eliminate any interference when trowelling.

Length: 8' Galvanized
1 1/2" 14 lbs/bdl = 25 pcs
2" 70 lbs/ctn = 75 pcs





SQUARE NOSE PLASTER STOP (with or without weep holes)

Plaster stop provides a professional finish between the plaster and the adjoining material, i.e. concrete acoustical tile, etc. Square Nose Plaster Stop is designed to work with metal lath. Key holes located on the 1 1/4" back nailing flange provide solid plaster bonding. If specified, weep holes spaced at 4" o/c allow for vapor evaporation or water drainage.

Length: 10' Galvanized
Dimension A: 3/4" 26 lbs/bdl = 20 pcs
1/2" 22 lbs/bdl = 20 pcs
3/8" 22 lbs/bdl = 20 pcs

Note: Please check with your local supplier for availability and for standard packaging details.




WIDE FLANGE STUCCO STOP (with or without weep holes)

Wide Flange Stucco Stop is manufactured with a 2" nailing flange to assure a tight fit. If specified; weep holes spaced at 4" o/c allow for vapor evaporation or water drainage.

Length: 10' Galvanized
Dimension A: 3/4" 40 lbs/bdl = 20 pcs
5/8" 39 lbs/bdl = 20 pcs
1/2" 38 lbs/bdl = 20 pcs

Note: Please check with your local supplier for availability and for standard packaging details.




NO. 90 SOLID WING EXPANSION JOINT

Solid Wing Expansion Joint is used to relieve stresses and strains in large plaster or stucco walls and ceilings.

Available in 1/2" or 3/4" depths.*

Length: 10' Galvanized
1/2" 60 lbs/ctn = 25 pcs
3/4" 52 lbs/ctn = 20 pcs
*3/8" available on request



NO. 15 EXPANSION JOINT

No. 15 Expansion Joint is made with diamond mesh flanges for solid keying in plaster and stucco. Designed to relieve stresses and strains in plaster and stucco walls and ceilings.

Available in 1/2" or 3/4" depths, other depths available on request

Length: 10'
1/2" 74 lbs/ctn = 24 pcs
3/4" 91 lbs/ctn = 24 pcs



METAL LATH APPLICATION - TECHNICAL NOTES

SUSPENDED PLASTER CEILING INSTALLATION

Support Channels shall be of the size and spacing for the distance between hangers.

MAXIMUM ALLOWABLE CHANNEL SPANS					
SUPPORT CHANNEL	SPACINGS				
	48"	42"	36"	30"	24"
3/4" x 1/2" Channel			2'	2'6"	2'6"
1 1/2" x 1/2" Channel	3'	3'6"	4'	4'6"	5'

Cross-furring shall be of the type and spacing for the distance between support channels.

MAXIMUM ALLOWABLE FURRING SPANS				
CROSS-FURRING	SPACINGS			
	24"	19"	16"	12"
3/8" Pencil Rod		2'	2'	2'6"
3/4" x 1/2" Channel	3'	3'	3'6"	4'

Metal lath shall be of the type and weight for the spacing of supports.

LATH TYPE	LATH WEIGHT (lbs/sq. yd.)	MAXIMUM SUPPORT SPACING
Diamond Mesh	2.5	12"
Diamond Mesh	3.4	16"
Flat Rib	3.4	19"
3/8" Rib	3.4	24"

INTERIOR APPLICATIONS

MAXIMUM SPACING OF SUPPORTS FOR METAL LATH (Inches & Millimetres)						
LATH TYPE		WALLS AND PARTITIONS			CEILINGS	
		WOOD STUDS	SOLID PARTITIONS	STEEL STUDS, WALL FURRING, ETC.	WOOD OR CONCRETE	METAL
2.5 lb./sq. yd.	Galv. Diamond	16" (D)	16"	16" (D)	12"	12"
3.4 lb./sq. yd.	Galv. Diamond	16" (D)	16"	16" (D)	16"	16"
3.4 lb./sq. yd.	Economy Flat Rib 1/8"	19"	24" (B)	19"	19"	19"
3.4 lb./sq. yd.	Hi-Rib Lath 3/8"	24"	(C)	24"	24"	24"

EXTERIOR APPLICATIONS

HORIZONTAL ASSEMBLIES (SOFFITS)			
		MAXIMUM SUPPORT SPACING	
LATH TYPE	LATH WEIGHT (lbs/sq. yd.)	WOOD/ CONCRETE SUPPORTS	METAL SUPPORTS
Diamond Mesh	3.4	16"	16"
Flat Rib	3.4	19"	19"
3/8" Rib	3.4	24"	24"

VERTICAL ASSEMBLIES				
		MAXIMUM SUPPORT SPACING		
LATH TYPE	LATH WEIGHT (lbs/sq. yd.)	WOOD STUDS	SOLID SURFACES	METAL STUDS
Diamond Mesh	3.4	16"	24"	16"
Flat Rib	3.4	19"	24"	19"
3/8" Rib	3.4	24"	24"	24"

NOTE:

Weights are exclusive of paper, fibre or other backing.

(A) 3.4 lb., 3/8" Rib Lath is permissible under Concrete Joists at 27" oc.

(B) This spacing permissible for Solid Partitions not exceeding 16" in height. For greater heights, permanent horizontal stiffener channels or rods must be provided on channel side of partitions, every 6' vertically, or else spacing shall be reduced 25%

(C) For studless solid partitions, lath erected vertically.

(D) These spacings are based on unsheathed walls. When partitions do not utilize studs, lath is to be erected vertically. When 2.5 lb or 3.4 lb. self-furring lath is placed over adequate sheathing or applied to a solid surface, the allowable support spacing for the lath may be increased to 24".

Technical information taken from M.L.S.F.A. "Specification for Metal Lathing and Furring." Complete specifications available from Bailey Metal Products on request.

APPLICABLE STANDARDS

ASTM C - 847 Standard Specification for Metal Lath

ASTM C - 933 Standard Specification for Welded Wire Lath

ASTM C - 841 Standard Specification for Installation of Interior Lathing and Furring

ASTM C - 1063 Standard Specification for Installation of Lathing and Furring to a Receive Interior and Exterior Portland Cement - Based Plaster

ASTM A 641 Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire

BAILEY METAL PRODUCTS LIMITED

MONTREAL
LES PRODUITS METALLIQUES BAILEY LTEE
5890 Avenue Andover
Ville Mont-Royal QC H4T 1H4
Tel: (514) 735 3455
(800) 263 3455
Fax: (514) 735 5052

TORONTO
One Caldari Road
Concord ON L4K 3Z9
Tel: (905) 738 6738
(800) 668 2154
Fax: (905) 738 5712

CALGARY
2515 Centre Avenue S.E.
Calgary AB T2A 2L1
Tel: (403) 248 3536
(800) 665 2013
Fax: (403) 248 0288

EDMONTON
5710 Roper Road N.W., Suite 101
Edmonton AB T6B 3G7
Tel: (780) 462 5757
(800) 563 1751
Fax: (780) 465 3791

VANCOUVER
7715 Anvil Way
Surrey BC V3W 6A2
Tel: (604) 590 5100
(800) 818 2666
Fax: (604) 599 5371